


GUND (Geoid Undulation) =
The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	89
HEIGHTS IN FEET ABOVE AD	(24)

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 12/30	Concrete/Asphalt	90/R/C/W/T	-
RWY 03/21	Asphalt	60/F/C/X/U	-
Aprons A, B	Concrete/Asphalt	100/R/C/W/T	30ft amsl
Aprons C, F, H	Concrete/Asphalt	50/R/A/X/U	-
Aprons G	Concrete/Asphalt	30/R/B/X/U	-
Taxiways R, J	Concrete/Asphalt	65/R/C/W/T	-
Taxiway S	Asphalt	60/F/B/X/U	-

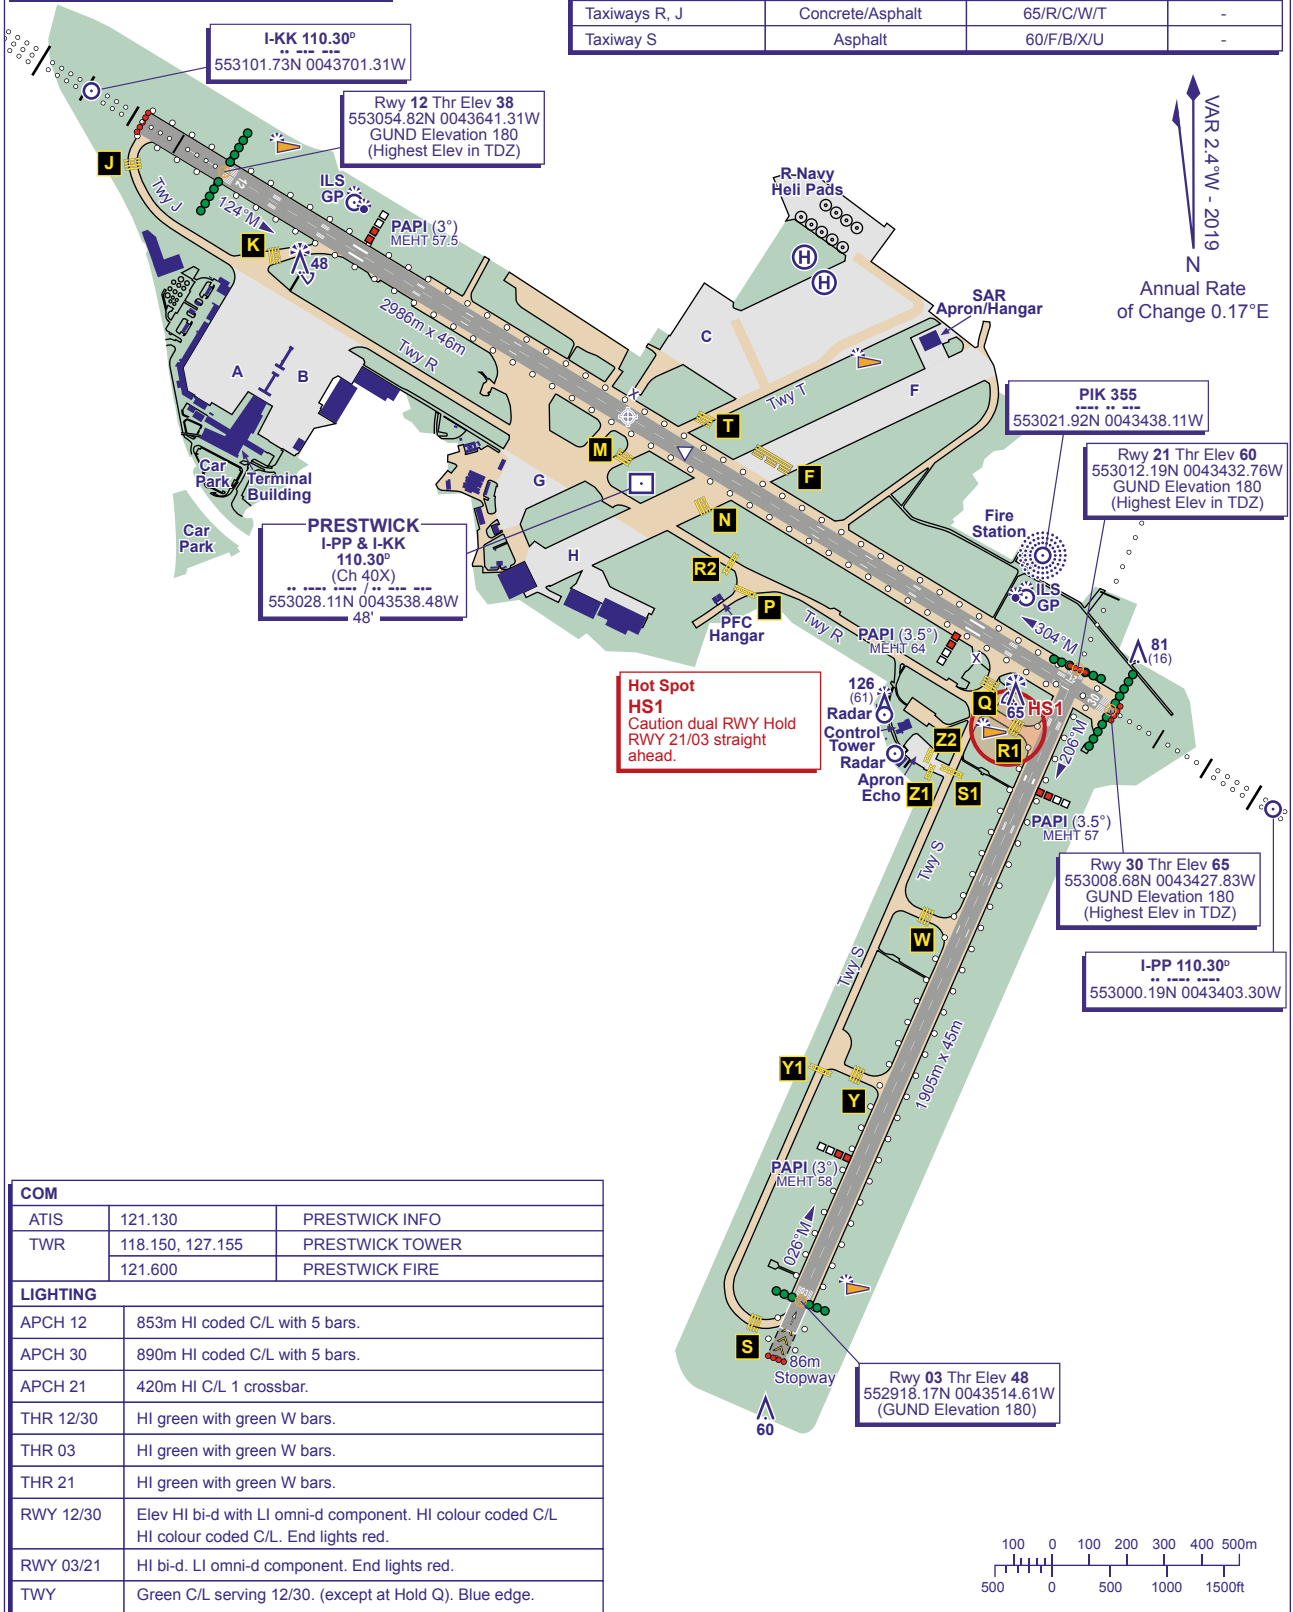

COM		
ATIS	121.130	PRESTWICK INFO
TWR	118.150, 127.155	PRESTWICK TOWER
	121.600	PRESTWICK FIRE

LIGHTING	
APCH 12	853m HI coded C/L with 5 bars.
APCH 30	890m HI coded C/L with 5 bars.
APCH 21	420m HI C/L 1 crossbar.
THR 12/30	HI green with green W bars.
THR 03	HI green with green W bars.
THR 21	HI green with green W bars.
RWY 12/30	Elev HI bi-d with LI omni-d component. HI colour coded C/L HI colour coded C/L. End lights red.
RWY 03/21	HI bi-d. LI omni-d component. End lights red.
TWY	Green C/L serving 12/30. (except at Hold Q). Blue edge.

CHANGE (4/20): LIGHTING TWY NOTE.